

Dynamic Analysis of Fluid-Filled Piping Systems Using Finite Element Techniques

G. C. Everstine

Numerical Mechanics Division,
David Taylor Naval Ship Research
and Development Center,
Bethesda, Md. 20884

Two finite element procedures are described for predicting the dynamic response of general 3-D fluid-filled elastic piping systems. The first approach, a low-frequency procedure, models each straight pipe or elbow as a sequence of beams. The contained fluid is modeled as a separate coincident sequence of axial members (rods) which are tied to the pipe in the lateral direction. The model includes the pipe hoop strain correction to the fluid sound speed and the flexibility factor correction to the elbow flexibility. The second modeling approach, an intermediate frequency procedure, follows generally the original Zienkiewicz-Newton scheme for coupled fluid-structure problems except that the velocity potential is used as the fundamental fluid unknown to symmetrize the coefficient matrices. From comparisons of the beam model predictions to both experimental data and the 3-D model, the beam model is validated for frequencies up to about two-thirds of the lowest fluid-filled lobar pipe mode. Accurate elbow flexibility factors are seen to be important for effective beam modeling of piping systems.

Introduction

The vibrations that occur in fluid-filled piping systems are of interest in a variety of industrial, aircraft, and shipboard applications. The interesting dynamic behavior includes both water hammer (a transient phenomenon) and the steady-state (time-harmonic) vibrations caused by unbalanced rotating machinery such as pumps, for example. Since Callaway, Tytzer, and Hardy [1] recognized in their experimental work the importance of the coupling between the vibrations of the liquid and the pipe wall, a number of investigators have proposed various techniques of mathematical modeling for design and analysis purposes.

Most of these techniques have been restricted to straight pipes. Some recent work, for example, was reported by El-Raheb [2, 3], who used Koiter's shell equations to analyze the acoustic propagation in a perfect, finite length, fluid-filled, thin elastic cylindrical shell. There have also been some finite element analyses of 2-D fluid cavities of general shape [4, 5]. These approaches, however, avoid the fluid-structure coupling by requiring as input the impedance of the pipe wall.

There has been relatively little fluid-structure interaction work involving general 3-D piping systems containing joints such as elbows and tees. The first such analyses were probably performed by Davidson, Smith, and Samsury [6, 7], who recognized that a simplified beam model should suffice for the relatively low frequencies which are often of interest. Low frequency dynamic behavior is characterized by pipes which respond only in their beam (rather than lobar) modes and by

fluid wavelengths which are large compared to the pipe diameter. Thus, for such situations, the fluid wave propagation through the pipes is essentially planar. This procedure, although fully general in concept, was implemented in a special purpose computer program limited as to the generality and size of problems which could be handled.

The same assumptions formed the basis of a finite element procedure developed by Howlett [8] for aircraft hydraulic systems. This procedure modeled the inside of the pipe as a beam having zero bending stiffness. Elbows and tees were not modeled explicitly. Instead, compatibility at a joint (elbow or tee) was enforced by an additional constraint requiring the conservation of fluid mass passing through the joint. The Howlett analyses, however, apparently omitted the correction to the fluid effective sound speed to account for the elasticity of the pipe walls and the flexibility factor correction for the elbows to account for the fact that curved pipes are considerably more flexible than straight pipes of the same cross section [9].

More recently, the transfer matrix approach was used by El-Raheb [10] to calculate the beam-type dynamic response of 3-D multiplane piping systems consisting of straight sections and elbows. One of El-Raheb's conclusions was that the one-dimensional acoustic assumption is valid for frequencies up to about one-half the frequency of the lowest acoustic mode having two waves around the circumference ($n = 2$).

Schwirian and Karabin [11] developed another finite element procedure which was similar to Howlett's [8] except that the fluid inside an elbow was apparently modeled with a single straight axial member ("spar" element) with fictitious properties assigned to simulate properly the fluid mass and compressibility. This model also included the pipe hoop strain correction to the fluid sound speed and the flexibility factor

Contributed by the Pressure Vessels and Piping Division and presented at 1984 PVP Conference and Exhibition, San Antonio, Texas, June 1984, of THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS. Manuscript received by the Pressure Vessels and Piping Division, October 11, 1984; revised manuscript received February 5, 1985.

correction to the elbow flexibility. No experimental validation of the model was included in the paper.

One additional modeling procedure was formulated by Hatfield and Wiggert [12], who used a transfer function approach involving separate analyses of liquid and solid components, followed by synthesis of the component solutions. The scheme was validated for planar piping systems by comparison with experimental data.

In general, beam models of fluid-filled elastic piping systems are very attractive because of their simplicity. Finite element approaches have the added feature of allowing essentially arbitrary specification of geometry, boundary conditions, loadings, and output requests. In addition, finite element models of piping system can easily be combined with models of the support structure.

In this paper, we will develop further the finite element approach for low-frequency prediction by combining ideas from the papers just mentioned. Our model is mathematically equivalent to the Davidson-Smith-Samsury model [6, 7], a nonfinite element approach. Our modeling scheme is similar to those of Howlett [8] and Schwirian and Karabin [11] except that we model elbows explicitly by a polygonal set of beam elements for the pipe and axial members for the fluid. We will also show the importance of assigning the correct flexibility factors to the elbows. (In general, most classical means of calculating flexibility factors are not adequate for elbows with straight pipe extensions at the ends [13, 14].) The beam modeling approach will be validated by comparing both to experimental data (where available) and a general 3-D finite element model which models the pipe as a shell and the contained fluid with 3-D fluid finite elements. Since the latter includes the essential physics of the fully coupled problems, it provides a good test for the approximate models.

Low-Frequency Beam Model

For low-frequency dynamic excitation of fluid-filled elastic piping systems, the pipes responds only in their beam (rather than lobar) modes, and the wave propagation in the fluid column is essentially planar. It is assumed either that the fluid is initially at rest, or that the average flow speed is so small compared to the sound speed that the acoustic response is unaffected. Except for inertial effects, the fluid-structure coupling is assumed to occur only at pipe bends and other joints. Thus, the fluid is allowed to slide without friction in straight sections of pipe. The circular pipe cross section is assumed to remain circular. The equations satisfied by either the fluid pressure or the axial component of fluid displacement is the scalar wave equation; thus the fluid can be modeled by an axial structural member (a rod element).

Finite element models are prepared using the following procedure: Beam elements are used to model both the straight sections and the elbows. If straight beam elements are used, a minimum of three elements is recommended (on the basis of some numerical testing) for 90-deg bends, regardless of the spacing of grid points in adjacent straight sections. In straight sections, the grid point spacing is dictated by the need for accurate vibration modes in the frequency range of interest.

Since a pipe bend is more flexible than an equivalent length of straight pipe, the moments of inertia for the beam elements in each elbow should be divided by the appropriate flexibility factor. For piping system with straight sections not significantly longer than the arc lengths of the elbows, the elbow stiffness plays an important role in the dynamic response and must be accurately modeled. Thus the flexibility factors assigned to each elbow should apply to the elbow as it is configured in the piping system. For example, the flexibility factors for 90-deg elbows with straight pipe extensions are sensitive to the length of those extensions [13, 14]. As shown by Quezon and Everstine [14], idealized approaches such as

those used in the ELBOW computer program [15] are generally not adequate for predicting the flexibility factors of 90-deg elbows with straight pipe extensions.

For the acoustic fluid inside the pipe, a duplicate set of grid points is defined to coincide with the pipe grid points. The fluid is modeled with elastic rod elements (sometimes called spars), which are equivalent to beam elements with zero flexural and torsional stiffness. These elements are assigned the actual mass density ρ for the fluid and a Young's modulus E is given by

$$E = B / (1 + BD/E_s t) \quad (1)$$

where B is the fluid bulk modulus of elasticity, D is the mean diameter of the pipe, E_s is the Young's modulus of the pipe material, and t is the pipe wall thickness. The denominator in equation (1) is a corrective factor which accounts for the elasticity of the pipe [16-18].

The fluid, which is modeled with axial members, must have only one independent degree of freedom (DOF) at each grid point. The three rotational DOF are restrained at all fluid points. Both transverse translational DOF at each fluid point are constrained (using multipoint constraints or rigid links) to move with the corresponding structural point. The only remaining DOF, the axial DOF, is free to slide relative to the beam. These constraints are applicable in both the straight sections and the elbows. It is therefore convenient to define for each elbow a separate cylindrical coordinate system whose axis is perpendicular to the plane of the elbow and intersects the center of the curvature. For elbows, the independent DOF is thus the azimuthal translation. For each straight section, it is convenient to define a separate Cartesian system with one axis coincident with the pipe axis. It is emphasized that the single independent fluid unknown is the axial displacement, not the pressure. The fluid pressure can be recovered from the finite element program in the usual way by requesting that stresses in the fluid elements be calculated and printed.

Damping in the piping system can be directly incorporated in the finite element model by entering the damping loss factor as a material damping constant, which results in complex material moduli.

Because of the versatility of finite element computer codes, various boundary conditions on the fluid column are possible. At a free surface (where the pressure vanishes), the fluid DOF (the axial displacement) is left free, a natural boundary condition. At a fixed boundary, the unknown is restrained. If the pipe model is part of a very long system, in which case a nonreflecting fluid boundary is needed, the plane fluid waves can be absorbed by attaching to the fluid DOF a dashpot whose constant (ratio of axial force to velocity) is $\rho c A$, where ρ is the fluid mass density, c is the effective sound speed in the fluid column, and A is the cross-sectional area of the fluid column. For a pipe that opens into a large volume of fluid (e.g., the sea), the appropriate boundary condition is that of a piston in an infinite baffle [19], in which case the scalar added mass $8\rho a^3/3$ is applied, where a is the radius of the opening. For a pipe with a closed end, the axial fluid displacement at the end is tied to the axial structural displacement using a multipoint constraint equation or rigid link.

The beam model just described can be applied using many general purpose finite element structural analysis codes without modification. The analysis is performed in a single pass with the fluid-structure coupling included in the model. The resulting model has seven independent degrees of freedom at each grid point location, six for the pipe and one for the axial component of fluid displacement. For matrix bandwidth reasons, each fluid grid point should be sequenced adjacent to its corresponding structural point. The major limitation of the model is that it is a low-frequency model.

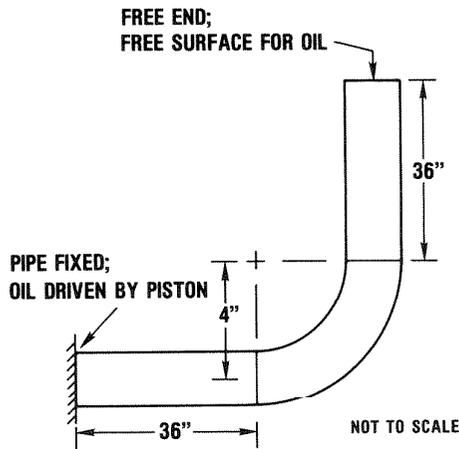


Fig. 1. Planar piping system

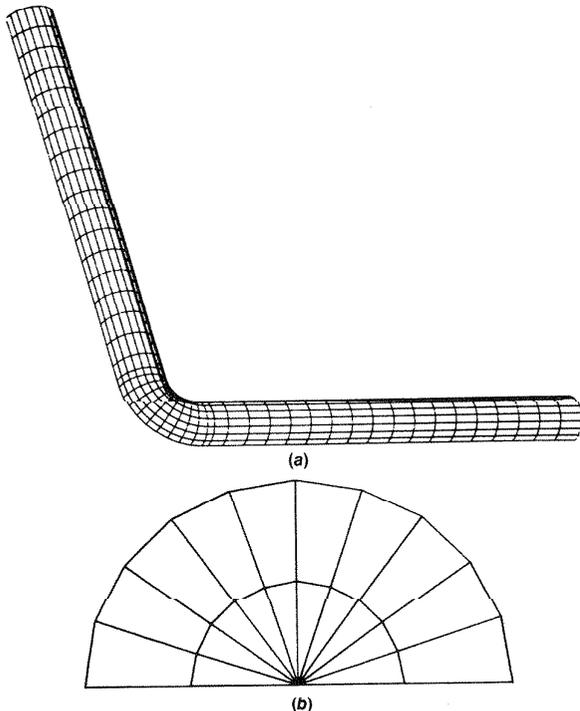


Fig. 2. Finite element model of planar piping system: (a) dry pipe; (b) fluid finite element mesh in cross section

Intermediate Frequency 3-D Model

For the finite element dynamic response prediction of piping systems at frequencies for which beam models are not valid, general three-dimensional models are required. In general, this approach models the pipe with shell elements and the contained fluid with 3-D acoustic finite elements. Thus the pipe need not respond only as a beam (for which the cross sections are rigid), and nonplanar fluid response is allowed. Such a model generally requires thousands of degrees of freedom, even for simple piping systems. Thus, although 3-D models may find only limited use (given current computing power), they are particularly useful for validating approximate models such as beam models since the limitations of the approximate model can then be determined.

The 3-D analyses made here use the generally classical procedures which evolved from the work of Zienkiewicz and Newton [20], except that the velocity potential is used as the fundamental fluid unknown to retain matrix symmetry [21-23]. NASTRAN was used for all analyses.

Table 1 Characteristics of planar piping system

Pipe (4-in. 70-30 Cu-Ni)	
Outside diameter (o.d.)	4.5 in.
Minimum wall thickness	0.203 in.
Nominal wall thickness	0.232 in.
Young's modulus	22,000,000 psi
Poisson's ratio	0.294
Weight density	0.323 lb/in ³
Elbow	
Bend radius (<i>R</i>)	4 in.
Bend angle	90 deg
Fluid (2190 TEP oil)	
Actual bulk modulus	282,000 psi
Effective bulk modulus in pipe	228,000 psi
Weight density	0.0315 lb/in ³

Example 1: A Planar Piping System

The formulations described in the preceding sections will be illustrated first on a simple planar piping system for which experimental data are available [6]. This system, shown in Fig. 1 and described in Table 1, consists of two straight sections of standard 4-in. copper-nickel pipe connected by an elbow. The system is filled completely with lubricating oil. At the fixed end of the pipe, the fluid was driven by a piston designed to excite only the fluid.

Both beam and 3-D models were prepared for this piping system using the finite element approaches described in the preceding sections. The beam model consisted of ten beam elements in each straight section and eight elements in the elbow. For this 2-D problem, each fluid and structural grid point had, respectively, one and three degrees of freedom (DOF). The beam model thus had 112 DOF. The elbow flexibility factor used for the beam analysis was 8.14, which was computed by the ELBOW computer program [15]. For inplane moment loads on elbows with long straight sections, ELBOW has been shown to be satisfactory, although it does overestimate the flexibility factors slightly [14].

The mesh used for the 3-D model is shown in Fig. 2. The structural element used is a low-order four-node quadrilateral plate (NASTRAN'S QUAD2). Because of symmetry, only half of the circumference (180 deg) was modeled. The model has ten elements in the circumferential direction, 19 elements longitudinally in each straight section, and nine elements in the elbow. The dry pipe thus had about 2800 DOF. The fluid finite element mesh had two elements (a constant strain wedge and an eight-node isoparametric hexahedron) in the radial direction between the center of the pipe and the shell. With the fluid added, the size of the 3-D model increased to about 3900 DOF.

The assumed uniform loss factor used for all calculations for this piping system was 0.0262, independent of frequency. This value was selected on the basis of previous experimental experience with similar systems.

The results of the analyses for this system are shown in Fig. 3 over the frequency range 10 Hz to 10,000 Hz. Mobility responses (the ratio of velocity response to driving force) are shown for both analytical models and the Davidson-Smith experimental data [6].

The $n=2$ lobar frequency for a long pipe can be estimated from the classical formula [24] for the plane strain vibrations of a ring. For a dry ring, the lowest $n=2$ frequency is

$$f = (1/2\pi) [3E_s t^2 / 5\rho_s r^4 (1 - \nu^2)]^{1/2} \quad (2)$$

where E_s , ρ_s , and ν are, respectively, the Young's modulus, mass density, and Poisson's ratio for the pipe material, t is the wall thickness, and r is the mean radius. Thus, from equation (2), for 4-in. Cu-Ni pipe, the lowest $n=2$ lobar mode occurs at about 1066 Hz for dry pipe. The corresponding fluid-filled frequency can be estimated if ρ_s in equation (2) is replaced by the effective density ρ_{eff} for the structure-fluid combination:

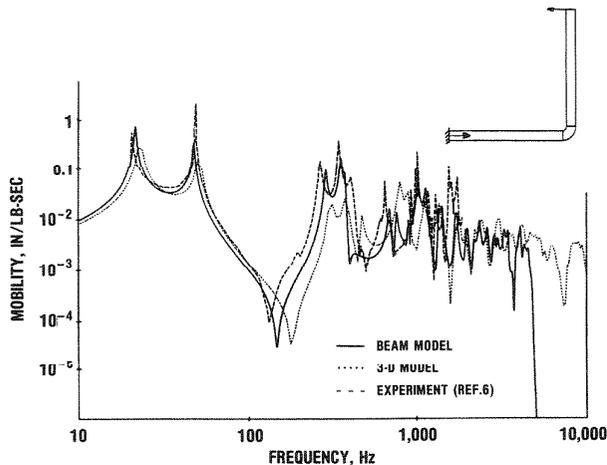


Fig. 3 Mobility of planar piping system: transverse response at free end

$$\rho_{eff} = \rho_s + \rho r / 2t \quad (3)$$

where ρ is the fluid mass density. With this correction, the lowest $n=2$ lobar frequency for oil-filled 4-in. Cu-Ni pipe is about 888 Hz.

Example 2: A Nonplanar Piping System

Although the results for the planar system show generally good agreement between the beam results and both the 3-D results and the experimental data, this planar system does not provide an adequate test of a beam model. One difficulty which arises with nonplanar systems is that the flexibility factor k is hard to calculate. Although idealized approaches for calculating k do not distinguish between inplane and out-of-plane cases, it has been shown [14] that, for 90-deg elbows with straight pipe extensions, the out-of-plane flexibility factor differs considerably from the inplane factor. In addition, many piping systems of practical interest have straight sections which are not so long (relative to the elbow arc length) as in the planar system of Example 1. We would expect the elbow flexibilities to become more important to the overall dynamic response for systems with shorter straight sections.

Here we consider a complex 3-D piping system (Fig. 4) consisting of four straight sections and three elbows (two 90-deg elbows and one 45-deg elbow). The pipe is filled completely with fresh water. Fluid free surfaces are assumed at both ends of the system. (Experimentally, such conditions could be simulated approximately by capping the ends with flexible rubber membranes.) The loading for this system is a time-harmonic force applied to the structure in the axial direction at point 1. The entire system is assumed to be freely suspended. No experimental data are available for this system.

Both beam and 3-D finite element models were prepared for this piping system. The beam model, which consisted of 21 beam elements, had 154 DOF. The 3-D model (Fig. 4) had about 7500 DOF (dry) and 9900 DOF (fluid-filled). The assumed loss factor used for both analyses was 0.02, independent of frequency.

Response predictions for this system are shown in Fig. 5. Since the same pipe size is used as in the planar system, the lowest $n=2$ dry lobar mode occurs at the same frequency, 1066 Hz. This pipe, however, is filled with water rather than oil, so the lowest fluid-filled $n=2$ lobar frequency is slightly lower: 867 Hz.

The flexibility factors for the 90-deg elbows in the beam model were estimated from the tables published by Quezon and Everstine [14] for 90-deg elbows with various lengths of

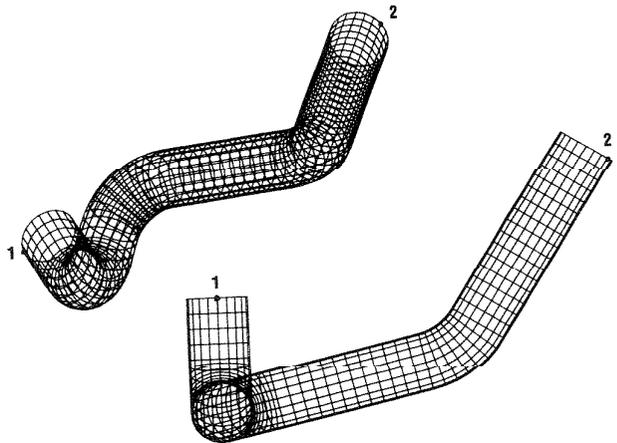


Fig. 4 Finite element model of nonplanar piping system (two views)

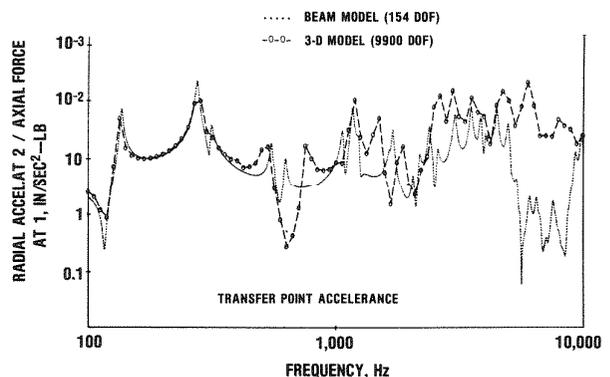


Fig. 5 Acceleration response of nonplanar piping system: transfer point acceleration

Table 2 Flexibility factors for nonplanar piping system

Elbow	Flexibility factors			
	Based on reference [14]		Elbow program [15]	Effect ignored
	Inplane	Out-of-plane		
1 (90-deg SR)	5.0	2.8	7.8	1.0
2 (90-deg SR)	5.4	2.8	7.8	1.0
3 (45-deg LR)	4.2	3.7	5.2	1.0

pipe extension. The flexibility factors for the 45-deg elbow in this system were estimated from similar tables now being compiled for 45-deg elbows. The flexibility factors used in this beam analysis are listed in the second and third columns of Table 2.

As seen in Fig. 5, the two analyses (beam and 3-D) are in very close agreement up to about two-thirds of the lowest $n=2$ fluid-filled lobar mode (867 Hz) of the pipe. This agreement indicates that the beam model is a valid model for low frequencies.

Sensitivity of Response to Flexibility Factors

Here we use the beam model of the nonplanar piping system to determine the effects of errors in the flexibility factors used in the analysis. Because the low-frequency beam results agree well with the 3-D model results in Fig. 5, the flexibility factors used are considered reasonably accurate.

For comparison purposes, analyses were also made using two other sets of flexibility factors. The first set was that calculated by the ELBOW computer program [15]. ELBOW is probably typical of the idealized approaches used by piping designers. The ELBOW program flexibility factors, which are in close agreement with the ASME code [25], are listed in column 4 of Table 2.

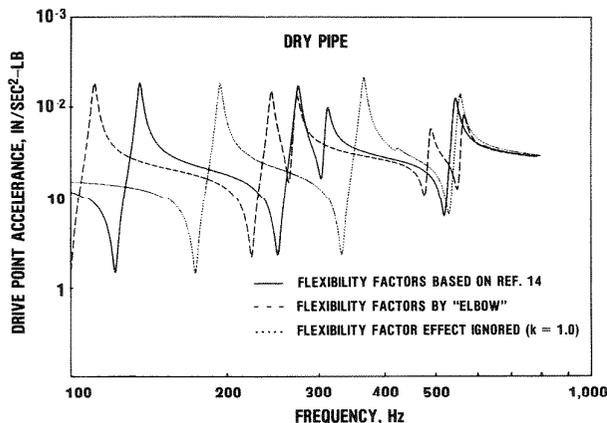


Fig. 6 Sensitivity of nonplanar piping system response to flexibility factors

The second additional set of flexibility factors used for an analysis was obtained merely by setting $k = 1.0$ for all factors. This analysis would show the consequences of ignoring the flexibility factor effect entirely.

The response predictions for all three sets of flexibility factors are shown in Fig. 6, in which the drive point accelerances (the ratio of acceleration to force) are plotted over the frequency range 100 Hz to 1000 Hz (the low-frequency regime). Figure 6 clearly indicates the importance of using accurate flexibility factors in the analysis.

Discussion and Conclusions

We have described two different finite element modeling procedures for predicting the dynamic response of general 3-D fluid-filled elastic piping systems. The beam model, a low-frequency procedure, was, for the nonplanar system considered, valid for frequencies up to about two-thirds of the lowest fluid-filled lobar ($n=2$) pipe mode. For frequencies between that and the lowest $n=2$ mode, the general finite element modeling procedure described could be used, although at great expense. For still higher frequencies, where the modal density is high, the finite element approach remains theoretically valid, but the analyst is probably wiser to use statistical techniques [26] instead.

It was shown that the accuracy of beam analyses of piping systems depends strongly on the accuracy of the flexibility factors used. Such factors are not required in the 3-D finite element model since they are implicit in a shell model of the pipe.

Finally, the beam analyses presented here used straight beams to model the bends (elbows). It would clearly be preferable to use instead curved beam elements, if available.

References

- 1 Callaway, D. B., Tytzer, F. G., and Hardy, H. C., "Resonant Vibrations in a Water-Filled Piping System," *Journal of the Acoustical Society of America*, Vol. 23, No. 5, 1951, pp. 550-553.
- 2 El-Raheb, M., "Acoustic Propagation in Finite Length Elastic Cylinders. Part I: Axisymmetric Excitation," *Journal of the Acoustical Society of America*, Vol. 71, No. 2, 1982, pp. 296-306.

- 3 El-Raheb, M., "Acoustic Propagation in Finite Length Elastic Cylinders. Part II: Asymmetric Excitation," *Journal of the Acoustical Society of America*, Vol. 71, No. 2, 1982, pp. 307-317.
- 4 Joppa, P. D., and Fyfe, I. M., "A Finite Element Analysis of the Impedance Properties of Irregular Shaped Cavities with Absorptive Boundaries," *Journal of Sound and Vibration*, Vol. 56, No. 1, 1978, pp. 61-69.
- 5 Astley, R. J., and Eversman, W., "A Finite Element Method for Transmission in Non-Uniform Ducts Without Flow: Comparison with the Method of Weighted Residuals," *Journal of Sound and Vibration*, Vol. 57, No. 3, 1978, pp. 367-388.
- 6 Davidson, L. C., and Smith, J. E., "Liquid-Structure Coupling in Curved Pipes," *The Shock and Vibration Bulletin*, Bulletin 40, Part 4, 1969, pp. 197-207.
- 7 Davidson, L. C., and Samsury, D. R., "Liquid-Structure Coupling in Curved Pipes—II," *The Shock and Vibration Bulletin*, Bulletin 42, Part 1, 1972, pp. 123-136.
- 8 Howlett, J. T., "Applications of NASTRAN to Coupled Structural and Hydrodynamic Responses in Aircraft Hydraulic Systems," *NASTRAN: User's Experiences*, NASA TM X-2378, National Aeronautics and Space Administration, Washington, D.C., 1971, pp. 407-410.
- 9 The M. W. Kellogg Company, *Design of Piping Systems*, Second Edition, Wiley, New York, 1964.
- 10 El-Raheb, M., "Vibrations of Three-Dimensional Pipe Systems with Acoustic Coupling," *Journal of Sound and Vibration*, Vol. 78, No. 1, 1981, pp. 39-67.
- 11 Schwirian, R. E., and Karabin, M. E., "Use of Spar Elements to Simulate Fluid-Solid Interaction in the Finite Element Analysis of Piping System Dynamics," *Nuclear Engineering and Design*, Vol. 66, No. 1, 1981, pp. 47-59.
- 12 Hatfield, F. J., and Wiggert, D. C., "Fluid-Structure Interaction in Piping by Component Synthesis," *Fluid Transients and Structural Interactions in Piping Systems*, eds., P. H. Rothe and D. C. Wiggert, The American Society of Mechanical Engineers, New York, 1981, pp. 13-20.
- 13 Rodabaugh, E. C., Iskander, S. K., and Moore, S. E., "End Effects in Elbows Subjected to Moment Loadings," Report ORNL/Sub-2913/7, Oak Ridge National Laboratory, Oak Ridge, Tenn., 1970.
- 14 Quezon, A. J., and Everstine, G. C., "Stress Indices and Flexibility Factors for 90-Degree Piping Elbows with Straight Pipe Extensions," DTNSRDC/CMLD-82/05, David W. Taylor Naval Ship R&D Center, Bethesda, Md., 1982.
- 15 Dodge, W. G., and Moore, S. E., "ELBOW: A Fortran Program for the Calculation of Stresses, Stress Indices, and Flexibility Factors for Elbows and Curved Pipe," Report ORNL-TM-4098, Oak Ridge National Laboratory, Oak Ridge, Tenn., 1973.
- 16 Streeter, V. L., *Fluid Mechanics*, Third Edition, McGraw-Hill Book Company, Inc., New York, 1962.
- 17 Krause, N., Goldsmith, W., and Sackman, J. L., "Transients in Tubes Containing Liquids," *International Journal of Mechanical Sciences*, Vol. 19, No. 1, 1977, pp. 53-68.
- 18 Joukowski, N., "Über den Hydraulischen Stoss in Wasserleitungsrohren," *Mémoire de l'Académie Impériale de Sciences de St. Petersburg*, Vol. 9, 8 Ser., No 5, 1900.
- 19 Ross, D., *Mechanics of Underwater Noise*, Pergamon Press, Inc., New York, 1976.
- 20 Zienkiewicz, O. C., and Newton, R. E., "Coupled Vibrations of a Structure Submerged in a Compressible Fluid," *Proceedings of the International Symposium on Finite Element Techniques*, Stuttgart, 1969, pp. 359-369.
- 21 Everstine, G. C., "A Symmetric Potential Formulation for Fluid-Structure Interaction," *Journal of Sound and Vibration*, Vol. 79, No. 1, 1981, pp. 157-160.
- 22 Everstine, G. C., "Structural Analogies for Scalar Field Problems," *International Journal for Numerical Methods in Engineering*, Vol. 17, No. 3, 1981, pp. 471-476.
- 23 Everstine, G. C., "Structural-Acoustic Finite Element Analysis, with Application to Scattering," *Proceedings of the Sixth Invitational Symposium on the Unification of Finite Elements, Finite Differences, and Calculus of Variations*, ed., by H. Kardestuncer, University of Connecticut, Storrs, Conn., 1982, pp. 101-122.
- 24 Den Hartog, J. P., *Mechanical Vibrations*, Fourth Edition, McGraw-Hill Book Company, Inc., New York, 1956.
- 25 American Society of Mechanical Engineers, "ASME Boiler and Pressure Vessel Code. Section III, Rules for Construction of Nuclear Power Plant Components," 1980 Edition.
- 26 Lyon, R. H., *Statistical Energy Analysis of Dynamical Systems: Theory and Applications*, MIT Press, Cambridge, Mass., 1975.